

[Submit your article](#)[Guide for authors](#)[Menu](#)[Search in this journal](#)

Material TECH 2022 (Second International Conference on Materials and Technologies)

Copyright © 2022 Elsevier Ltd. All rights reserved. Selection and peer-review under responsibility of the scientific committee of the “Material TECH 2022 (Second International Conference on Materials and Technologies)”.

Edited by Swati Sharma, Neha Gupta, N.V. Swamy Naidu, Dr Jagadish

Volume 59, Part 3,

Pages A1-A64, 1577-1858 (2022)

[Download full issue](#)

[← Previous vol/issue](#)[Next vol/issue >](#)

Receive an update when the latest issues in this journal are published

[Sign in to set up alerts](#)

Research article Abstract only

A decision-making model for tool material selection in electrical discharge machining

Aswin Ganesh V, Balakumaran S, Bharath Kumar L, Siddhartha Kar

Pages A1-A6

Article preview [▼](#)

Research article Abstract only

Prediction of plastic viscosity and yield stress of self-compacting concrete using machine learning technics

Yousef EL Asri, Mouhcine Benaicha, Mounir Zaher, Adil Hafdi Alaoui

Pages A7-A13

Article preview [▼](#)


Research article Abstract only

Experimental investigation and numerical analysis of axle spline shaft analysis for different materials

Vishal Naranje, Sachin Salunkhe

Pages A14-A21

[FEEDBACK](#)


Article preview 

Research article Abstract only

Comparative structural and frictional analyses on various lightweight materials for aircraft disc brake

A. Maria Vinsiya, B. Rohini Janaki, R. Martina Kings, R. Vijayanandh, ... S. Balasubramanian

Pages A22-A35

Article preview 

Research article Abstract only

Parametric study using response surface methodology of Ti-Al₂O₃ (15 vol% of Ti taken as Al₂O₃ reinforced as alumina fibre into titanium matrix) composite material while undergoing WEDM process

Dwaipayan De, Titas Nandi, Asish Bandyopadhyay

Pages A36-A44


Article preview 

Research article Abstract only

Enhancing wear properties of Al6061 metal-matrix composites by reinforcement of ZrB₂ nano particles

Priyadarsini Morampudi, V.S.N. Venkata Ramana, K. Sriram Vikas, Rahul, Chitrada Prasad

Pages A45-A51


Article preview 

Research article Abstract only

Custom orthotics development process based on additive manufacturing

Piyush Patel, Piyush Gohil

Pages A52-A63


Article preview 

Research article Abstract only

Design optimization of PLA lattice in 3D printing

R. Jain, N. Gupta

Pages 1577-1583


Article preview 

Research article Abstract only

Parametric study of electric discharge machining of titanium grade 2 alloy in distilled water

Binoy Kumar Baroi, Jagadish, Promod Kumar Patowari

Pages 1584-1590

Article preview 

Research article Abstract only

Laboratory investigation of bituminous concrete using Reclaimed asphalt pavement and waste Engine oil

Vinod Kumar Sharma, Rajiv Kumar, Amrit Pal Singh

Pages 1591-1598

Article preview 


Research article Abstract only

FEEDBACK 

Experimental investigation study on enhancing the thermal and rheological properties of sunflower vegetable oil with ZnTiO₃, BN, CuO nanofluid for machining of Inconel-718 under minimum quantity lubrication (MQL)


Pandi Jyothish, V. Vasu, Dhurke Kashinath
Pages 1599-1607

Article preview 

Research article  Abstract only

Assessment of dimensional accuracy of 3D printed part using resin 3D printing technique


B.N. Dhanunjayarao, N.V. Swamy Naidu
Pages 1608-1614


Article preview 

Research article  Abstract only

An integrated sustainable lean approach for the SMEs in India: A multi-level conceptual frame work


Vivek Gopi, P.G. Saleeshya
Pages 1615-1620


Article preview 

Research article  Abstract only

Electrical and magnetotransport properties of In_{0.95}Mn_{0.05}Sb film


Naveen Agrawal, Mitesh Sarkar, D.K. Dhruv
Pages 1621-1624

Article preview 

Research article  Abstract only

Effect of utilization of rice husk ash on hardened properties of recycled concrete aggregate

Bandana Jethy, Sriparna Paul, Bibekananda Naik
Pages 1625-1635

Article preview 

Research article  Abstract only

Experimental investigation on mechanical properties of Basalt/Jute/SiC reinforced hybrid polymer composites


Ganesh R., Anand P.
Pages 1636-1642


Article preview 

Research article  Abstract only

Microstructural and defects characteristics of $xV_2O_5-(1-x)(0.35MoO_3-0.65ZnO)$ glass nanocomposites utilizing positron annihilation spectroscopy and correlated experimental methods

Anindya Sundar Das, Dipankar Biswas
Pages 1643-1650


Article preview 


Research article  Abstract only

Three-way compatibility study among Nanoparticles, Ionic Liquid, and Dispersant for potential in lubricant formulation

FEEDBACK 


Upendra Maurya, V. Vasu, Dhurke Kashinath
Pages 1651-1658

Article preview 

Research article  Abstract only

Effect of Grade 5 titanium interlayer on microstructure and pitting corrosion behaviour of AA1100/A36 explosion welds

K. Sri Ram Vikas, Rahul, Ch. Kishore Reddy, V.S.N. Venkata Ramana, ... Ch. Prasad
Pages 1659-1665


Article preview 

Research article  Abstract only

Failure mechanism of resistance spot-welded DP600 steel under high cycle fatigue


Gorti Janardhan, Goutam Mukhopadhyay, Krishna Dutta
Pages 1666-1671

Article preview 

Research article  Abstract only

Power generation with PCM based Dye-sensitized solar cell using different dyes – An experimental study

Biswajit Nath, Sujit Roy
Pages 1672-1676

Article preview 

Research article *Open access*

Influence of porosity to dynamic Young's modulus of sintered iron. Bayesian approach


Diayn M. Dimitrov, Desislava Mincheva, Stoyan D. Slavov
Pages 1677-1682

 [Download PDF](#) Article preview 

Research article  Abstract only

Self-Compacting geopolymer Concrete: A review

Mansi Thakur, Shailja Bawa
Pages 1683-1693

Article preview 

Research article *Open access*

Characterization of waste cooking oil and waste engine oil on physical properties of aged bitumen

Arijit Kumar Banerji, Dibakar Chakraborty, Aparajita Mudi, Priyanka Chauhan
Pages 1694-1699

 [Download PDF](#) Article preview 

Research article  Abstract only

Experimental Investigation of Effect of Recycled Coarse Aggregate Properties on the Mechanical and Durability Characteristics of Geopolymer Concrete

H.V. Moulya, A. Chandrashekhar
Pages 1700-1707

Article preview 

FEEDBACK 

Research article Abstract only

Physical, mechanical and corrosion properties of Al6061/ZrB₂ metal matrix nano composites via powder metallurgy process

Priyadarsini Morampudi, V.S.N. Venkata Ramana, Chitrada Prasad, K. SriramVikas, Rahul
Pages 1708-1713

Article preview 

Research article Abstract only

Manufacturing and mechanical properties of phenol Formaldehyde- Polyacrylonitrile based carbon composites for thermal protection system

Basingala Praveen Kumar, N.V. Swamy Naidu, B. Sateesh, Radhika Kotha
Pages 1714-1718

Article preview 

Research article *Open access*

Analysis of failure causes of S135 drill pipe

Daniela Spasova, Yaroslav Argirov, Nikolay Atanasov, Radostina Yankova
Pages 1719-1725

 [Download PDF](#) Article preview 

Research article Abstract only

Synthesis, characterization and application of polymer composite materials in wastewater treatment

Nageswara Rao Lakkimsetty, S. Feroz, S. Karunya, L. Motilal, ... G. Suman
Pages 1726-1734

Article preview 

Research article Abstract only

Prediction of mechanical properties of aluminium metal matrix hybrid composites synthesized using Stir casting process by Machine learning

Rutuj Rajput, Abhishek Raut, Srinivasu Gangi Setti
Pages 1735-1742

Article preview 

Research article Abstract only

Design and numerical simulation of power operated pipe bin structure

Hums Javed, Sumiya Anjum, Vishal Naranje, Sachine Salunkhe
Pages 1743-1748

Article preview 

Research article Abstract only

Effect of transus based heat treatment on material characterisation of wrought and additive titanium alloy Ti-6Al-4 V

Ashwin Polishetty, Junior Nomani, Guy Littlefair
Pages 1749-1753

Article preview 

Research article Abstract only

Machinability study of Al and Mg-based metal matrix composites using wire-EDM

Pallab Sarmah, Promod Kumar Patowari

Pages 1754-1759

Article preview 


Research article  Abstract only

Predication of temperature distribution and strain during FSW of dissimilar Aluminum alloys using Deform 3D

Sivasankara Raju R, Jagadish, CJ Rao, Satish Kumar Aadapa, Sagar Yanda

Pages 1760-1767

Article preview 


Research article  Abstract only

Experimental evaluation of thermal stress on the surface of butterfly specimen through irreversible colour change of thermal paint

P.L. Rupesh, K. Raja, Sathyaseelan, K. Sunil Kumar, ... P.T. Dinesh Kumar

Pages 1768-1775


Article preview 

Research article  Abstract only

Structural, electronic and optical properties of ternary rare-earth based GdPtSb half Heusler compound

Jagdish Kumar Satyam, Sapan Mohan Saini

Pages 1776-1780


Article preview 

Research article  Abstract only

Numerical analysis of vertical axis wind turbine blades in ANSYS Fluent

Shivam Shukla, C.J. Ramanan, Bhaskor Jyoti Bora, Arjun Deo, Nur Alom

Pages 1781-1785

Article preview 

Research article  Abstract only

Dynamic characterization of hybrid composite based on flax/E-glass epoxy composite plates

Sumathy Muniamuthu, K. Sunil Kumar, K. Raja, P.L. Rupesh

Pages 1786-1791

Article preview 

Research article  Abstract only

IoT for vibration measurement in engineering research

N.V.S. Shankar, V.S.N. Venkata Ramana, A. Sravani, P. Sreenivasulu, K. Sriram Vikas

Pages 1792-1796


Article preview 

Research article  Abstract only

Improving the accuracy of the behaviour simulation of the material of the turbojet aircraft engine fan rotor blades in the event of a bird strike by using adapted finite element computational models


Vyacheslav Merculov, Mykola Kostin, Gennadii Martynenko, Natalia Smetankina, Volodymyr Martynenko
Pages 1797-1803


Article preview 

Research article  Abstract only

Numerical study of nonlinear wave flow past vertically submerged plate over uneven bottom


Surendra Singh Yadav
Pages 1804-1809

Article preview 

Research article  Abstract only

Investigation on tool wear and chip morphology in hard turning of EN 31 steel using AlTiN-PVD coated carbide cutting tool


Saswat Khatai, Ramanuj Kumar, Ashok Kumar Sahoo, Amlana Panda
Pages 1810-1816

Article preview 

Research article  Abstract only

Design and analysis of cantilever beam used Kevlar fiber composite for automobile applications


K. Karthik, Neethish Kumar Unnam, J. Thamilarasan, S. Kolappan, R. Rameshkumar
Pages 1817-1823

Article preview 

Research article  Abstract only

Unfolding the network dataset to understand the contribution of features for detecting malicious activities using AI/ML


Monika Khatkar, Kaushal Kumar, Brijesh Kumar
Pages 1824-1830

Article preview 

Research article  Abstract only

Interface layer DFT study of first transition series XO oxides (X = Ti, Cr, Mn, Fe, Co, Ni, Cu and Zn)


Jyoti Sahu, Hemant Kumar, Deepti Pateria, Swati Verma, Mohan L. Verma
Pages 1831-1838


Article preview 

Research article  Abstract only

Fracture analysis of Pre-cracked 8YSZ TBCs with edge and internal cracks under Thermo-mechanical load: A numerical approach

Prajakta Jagtap Kadam, Adinath Damale, Nikhil Kadam
Pages 1839-1845

Article preview 

Research article  *Open access*

Effect of beam oscillation on the fluid flow during laser welding

Anand Mohan, Dariusz Ceglarek, Michael Auinger
Pages 1846-1851

 [Download PDF](#) Article preview 

FEEDBACK 

Research article Abstract only

An investigation on mechanical properties of SiC reinforced epoxy composite synthesized at room temperature

Bikash Ranjan Moharana, Dillip Kumar Biswal, Anway Maiti, Ashutosh Pattanaik

Pages 1852-1857

Article preview

[< Previous vol/issue](#)

[Next vol/issue >](#)

ISSN: 2214-7853

Copyright © 2022 Elsevier Ltd. All rights reserved



Copyright © 2022 Elsevier B.V. or its licensors or contributors.
ScienceDirect® is a registered trademark of Elsevier B.V.





Characterization of waste cooking oil and waste engine oil on physical properties of aged bitumen

Arijit Kumar Banerji*, Dibakar Chakraborty, Aparajita Mudi, Priyanka Chauhan

Department of Civil Engineering, Dr. B. C. Roy Engineering College, Durgapur, W.B, 713206, India

ARTICLE INFO

Article history:
Available online 31 March 2022

Keywords:

Waste cooking oil
Waste engine oil
Bitumen
Ageing
Physical Properties

ABSTRACT

Waste cooking oil (WCO) and waste engine oil (WEO) have been generated in huge quantities in recent years as a result of the improvement of society's living standards and the advancement of automobiles and The molecular structure of WCO and WEO is similar to bitumen, indicating their potential for usage in highway construction to mitigate the hardening effect of recovered asphalt pavement materials. In this study, five different ratios of WCO and WEO were blended with VG40 grade bitumen under ageing conditions in accordance with the adaptability of the paving bitumen specification (IS 73: 2013). The waste oil treated samples were artificially short-aged by means of the thin film oven test. The penetration, softening point, viscosity, temperature sensitivity, penetration ageing ratio, and ductility tests were used to evaluate the physical performance parameters of the WCO and WEO modified bitumen.

The results of the tests reveal that the blending of WCO and WEO with neat bitumen softens the workability of aged bitumen. The physical properties of aged bitumen improved when treated with WEO as compared to when treated with WCO. Based on the results of the analyses and the overall ranking, it has been found that a blend of 3 percent WEO and 3 percent WCO resulted in the most significant improvement in bitumen modification. Significant differences were observed when waste oil was blended with a higher percentage, resulting in a change in the grade of bitumen.

Copyright © 2022 Elsevier Ltd. All rights reserved.

Selection and peer-review under responsibility of the scientific committee of the “Material TECH 2022 (Second International Conference on Materials and Technologies)”. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Waste cooking oil (WCO) and waste engine oil (WEO) have been produced in huge quantities in recent years as a result of the advancement of automobiles and the improvement of society's living standards. With the increase in the number of vehicles on the road, the amount of WEO being generated around the world is increasing. As a result of continuous engine operation, the performance of the oil degrades with time, and it becomes increasingly difficult to recycle WEO as new motor oil. WEOs are by-products of petroleum products, such as discarded motor oil from automobiles, and they possess most of the same fundamental physical and chemical features as bitumen [1]. Furthermore, an increasing population has led to an increase in the production of food items, resulting in the generation of a large amount of kitchen waste. One of the most widely used kitchen items is edible cooking oil, which can be obtained from a wide range of feed ingredients, including plant and vegetable oils, animal fats, and a variety of

other sources. When different types of edible vegetable oils, animal oils, and palm oil are used, waste cooking oil (WCO) is produced after the frying and cooking process. [2]. WEO and WCO have risen to the level of important environmental pollutants because they have the potential to pollute rivers and natural resources. The proper disposal of this waste oil is a major concern because it has the ability to increase environmental and municipal issues. Waste oil dumping into landfills or rivers, in general, has a negative impact on the environment since it is not processed before it is dumped. One of the most severe ecological issues that can arise is eutrophication, which occurs when sunlight cannot penetrate the surface of a river because of a thin coating of oil impeding its path. When eutrophication occurs in a river, the oxygen supply for marine life is disrupted over time. As a result, engine oil from automobiles and waste cooking oil are the most significant sources of river contamination. The responsibility for managing the high construction costs and reducing the waste disposal difficulties has prompted the practise of waste oil recycling as an option and alternative way of preventing these issues from occurring [3].

Treatment or recycling of these waste oils not only helps reduce pollution and save energy, but it is also an example of a new way of

* Corresponding author.

E-mail address: arijit.banerji@bcrec.ac.in (A.K. Banerji).

reusing waste. India consumes 102 billion litres of fuel and 23 million tonnes of edible oil every year, according to the International Energy Agency. Approximately 3 million tonnes of oil are thrown away after usage, and this is referred to as “used cooking oil.” The combustion of WEO will release airborne pollutants into the atmosphere, which can enter people’s lungs and cause serious health consequences. Food business operators (FBOs) are required to discard the cooking oil after four times of frying or when the total polar compound levels exceed 25. In the process of continually raising the temperature of oils to their boiling points, free reactive oxygen forms, which contributes to peroxidation by raising the levels of glucose, creatinine, and cholesterol in the body. Polyunsaturated fatty acid molecules in the oil are altered by repeated frying, leading to the development of reactive monomers, dimmers, and polymers that degrade into poisonous malondialdehyde, which has been linked to coronary heart disease and some malignancies. Researchers discovered that the molecular structure of WEO and WCO is comparable to that of bitumen, indicating that they have the potential to be used in highway construction to decrease the hardening effect of reclaimed flexible pavement materials after being reused. Bitumen, which is the residue left over following the distillation of crude oil, is divided into four fractions: saturates, aromatics, resins, and asphaltenes [3]. Saturates are the most abundant part, followed by aromatics and resins. The chemicals can be divided into two generic families, maltenes and asphaltenes, which are the most commonly encountered. Asphaltenes are the black-coloured portions that are insoluble in n-heptane and have the maximum polarity and molecular weight, whereas maltenes, which are also soluble in n-heptane, are composed of saturated and aromatic compounds as well as resins, whereas asphaltenes are composed of saturated and aromatic compounds as well as resins. A low viscosity material for recycling aged bitumen can be created using WEO and WCO, which are suitable for each other according to the suitability hypothesis of rejuvenation [1]. From the time of manufacturing until the end of the pavement’s service life, bitumen will begin to deteriorate. It is believed that there are four major variables that contribute to the process of ageing: ultraviolet rays, moisture, time, and temperature. These factors create a change in the chemical structure and, consequently, the rheology of the substances of concern [4].

A number of researchers have previously suggested various bitumen rejuvenators and investigated their effects on the characteristics of aged bitumen. Overall, ageing can be divided into two categories: time duration and frequency of occurrence. Short-term ageing is defined as the period between the production of hot mix asphalt and the opening of the pavement to traffic, whereas long-term ageing is defined as the period between the opening of the pavement to traffic and the production of hot mix asphalt. In the laboratory, ageing can be simulated using standard and non-standard methods such as the thin film oven test, the pressure ageing vessel test, and oxidative ageing for both short and long-term ageing situations [5]. On the whole, several studies were presented, including the utilization of waste oil [6–11]. As a result, the recycling and reuse of oils in modified asphalt materials can serve as a source for the appropriate conversion of waste material properties into environmentally friendly materials. The proposed method has the potential to improve the properties of aged bitumen as well as provide an efficient way of restoring the usability of aged bitumen by utilizing waste oil.

2. Research objective

The purpose of this research is to develop a sustainable bitumen that can be used in place of bitumen in flexible pavement. To achieve this goal, it is necessary to integrate bio-based waste prod-

ucts with standard bitumen while simultaneously reducing the percentage of bitumen in the bituminous mixes. According to the adaptability of the paving bitumen specification by Indian Standard IS 73: 2013, five different ratios of WCO and WEO are blended with Viscosity Grade VG-40 bitumen under ageing conditions and evaluated for their performance. The thin film oven test (TFOT) was used to age the waste oil treated samples for an artificially short period of time. To further assess physical performance parameters, tests such as penetration, softening point, viscosity, penetration index, penetration ageing ratio, and ductility were performed on the samples. Based on the physical performance parameters, an optimal type and content of waste oil was suggested.

3. Materials used and experimental program

3.1. Bitumen

India has an averagely hot climate, with summer mean temperatures reaching 35–40°C and winter mean temperatures reaching more than –10°C. Accordingly, it is necessary to design pavements that are stable enough during the summer and winter seasons, respectively, while keeping this in mind. This investigation makes use of VG 40 (Viscosity Grade) bitumen supplied by Hindustan Colas Ltd. (HINCOL). It is necessary for paving bitumen to meet standard specifications in order to achieve uniform and safe operations in accordance with the Bureau of Indian Standards for Viscosity Grade, as specified in IS 73: 2013 [12]. In accordance with ASTM D1754 [13], the TFOT was conducted at 163°C for 300 min. It is possible to determine the effects of heat and air by comparing the physical properties of the samples measured before and after the oven condition, as well as the change in sample mass. Using this method, it is possible to estimate the approximate change in bitumen properties during conventional hot-mixing [14]. It produces a residue that is similar in appearance to the asphalt condition as it was incorporated into the pavement. The fundamental properties of VG 40 are shown in Table 1.

3.2. Waste engine oil (WEO)

The waste engine oil used in this study is a dark, oily liquid that is used as a solvent (Fig. 1a). Without any special treatment, it was collected directly from a nearby repair garage in Durgapur, West Bengal, India, and used in its natural form. The physical properties of this WEO are shown in Table 2.

3.3. Waste cooking oil (WCO)

Waste cooking oil (Fig. 1b) was a palmolein oil that was collected from various fritter shops and sieved on a 75 µm sieve to ensure that there were no particulate matters. It was filtered to remove any dirt or other suspended materials that might have been present. The basic properties of the WCO that have been tested, as shown in Table 2.

Table 1
Specification and values obtained for VG 40.

Characteristics	Requirements	Results
Penetration at 25 °C, 100 g, 5 s, 0.1 mm	Min. 35	36
Softening Point °C (R&B)	Min. 50	58.5
Flash Point °C (Cleveland open cup)	Min. 220	330
Kinematic viscosity at 135 °C, cSt	Min. 400	493.05
Ductility, cm	NA	100
Specific gravity	NA	1.02
Tests on residue from thin film oven test: Ductility, cm	Min. 25	32

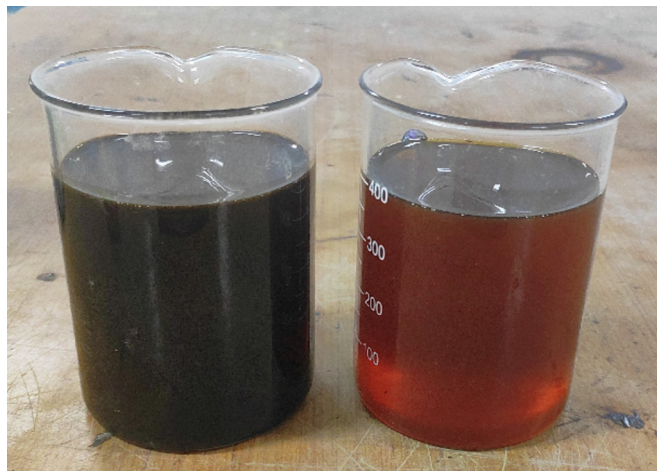


Fig. 1. (a) Waste engine oil; (b) Waste cooking oil.

Table 2
Physical Properties of WEO and WCO.

Items	WEO	WCO
Density (g/cc)	0.89	0.91
Viscosity (cP) at 40 °C	102	73
Flash Point (°C)	198	265

3.4. Experimental program

According to Table 1, conventional physical properties tests are used to determine the physical characteristics of the binder, including the penetration test, softening point test, ductility test, specific gravity test, and flash point test. Initial modifications were made to the VG 40 bitumen by replacing a portion of it with WCO and WEO at concentrations ranging from 1% to 2% to 3% to 4% to 5% by weight of the binder. In order to investigate the effect of waste oil on the physical properties of bitumen, this modified bitumen, also known as WCO and WEO modified bitumen, was used. The modified bitumen used in this study was created by manually mixing WCO and WEO with the VG 40 bitumen at a temperature of 150°C until a visibly relatively homogenous mix was formed. Following that, the modified bitumen was subjected to the following tests.

3.4.1. Penetration test

The consistency and deformation resistance of the bitumen are determined through the penetration test. In bituminous materials, penetration is defined as the distance, measured in tenths of millimetres, that a standard needle will penetrate vertically when subjected to a standard temperature of 25°C, 100g load, and 5s time duration. The test is carried out in accordance with IS: 1203–1978 [15]. A higher penetration value represents a softer consistency, while lower values indicate the reverse. Additionally, the penetration ageing ratio can be used to determine the effect of ageing on modified binder with waste oils. The penetration ageing ratio of aged bitumen compared to unaged bitumen reflects the change in characteristics of the bitumen as a result of the ageing of the asphalt [16].

3.4.2. Softening point test

The softening point of a material determines its thermal sensitivity at a higher temperature at which it achieves a specific degree of softening. The softening point test was performed in accordance with IS: 1205–1978 [17], using the ring and ball apparatus. This

test indicates the material's tendency to flow at higher temperatures. The softening point is measured on the basis of the temperatures at which the two rings soften sufficiently to allow each ball of 9.5mm in diameter, weighing 3.5g, covered in bitumen, to fall 25mm [18].

3.4.3. Viscosity test

The coefficient of viscosity is based on the relationship between the applied shear stress and the rate of shear in a fluid. The viscosity of bitumen is the characteristic that allows it to resist flow and thus provide resistance to it. Bitumen exhibits both viscous and elastic properties, and it is important to note that the viscosity of bitumen is highly dependent on its temperature and gets reduced with an increase in temperature [19]. This test method demonstrates how to measure apparent viscosity with a rotational viscometer. A Brookfield Rotational Viscometer was used for the test, which was carried out in accordance with ASTM D 4402–06 [20].

3.4.4. Ductility test

It is important for a binder to generate a thin ductile film around the aggregates in a flexible pavement design to increase the aggregates structural interlocking and improve the overall performance. The ductility test is carried out in accordance with IS: 1208–1978 [21]. This test determines the adhesive properties of bitumen as well as its capacity to stretch under certain conditions. The ductility of bitumen is defined as the distance in centimetres, to which the bitumen filled in a standardized briquette elongates before the thread of bitumen breaks.

3.4.5. Temperature sensitivity test

The penetration index of bitumen is a measure of the material's temperature sensitivity. This index is based on the values of the penetration and softening points of bituminous materials. The greater the penetration index value, the lower the vulnerability to temperature changes. This feature can be used to anticipate the behaviour of bitumen under a variety of climatic situations, as well as to describe the flexibility and deformability of asphalt binders, among other applications. The rise in the penetration index value increases the flexibility and deformability of asphalt binders, which are both beneficial properties. A high penetration index number for bitumen makes them more acceptable for use in cold areas, whereas a low penetration index value makes them more ideal for use in warm climates [18].

4. Test results and discussion

4.1. Effect of WEO and WCO on penetration value

The penetration and softening point tests are the two most essential tests that are performed to examine the physical properties of bituminous materials. Fig. 2 depicts the results of a penetration test conducted on bitumen that has been treated with WCO and WEO. When tested in aged conditions, the VG 40 bitumen sample had a penetration value of 29mm, and under standard conditions a penetration value of 36mm was observed. An increase in penetration value was achieved by the addition of WEO, which resulted in an increase with a linear slope of $R^2 = 0.97$, while the addition of WCO resulted in an increase with a linear slope of $R^2 = 0.98$. This rise was observed within a 45-mm limit (Clause 6.2 IS: 73–2013 for VG 30 grade) up to mixing values of 3 percent of the waste oils. Variations in the physical properties of modified bitumen with varying oil content can be attributed to the majority of the observed changes in the results. Irrespective of whether WEO or WCO was utilized to modify the bitumen, the values

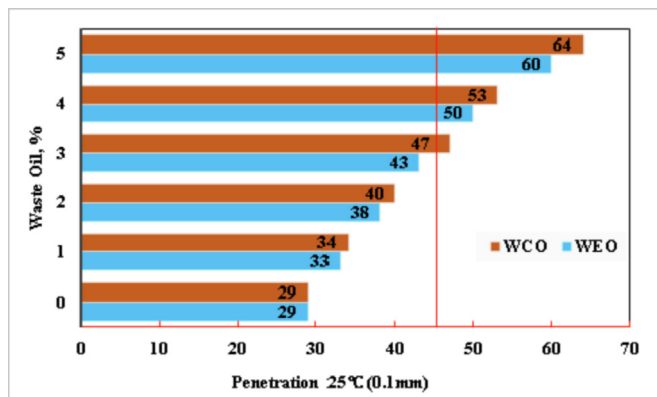


Fig. 2. Effect of WEO and WCO on penetration value.

obtained for aged bitumen followed the same pattern, since all of the aged bitumen softened as the WEO or WCO dosages were increased. As a result, only 3% of waste oil was deemed optimal because it produced satisfactory results.

4.2. Effect of WEO and WCO on softening point

A bitumen with a higher softening point is preferable because bitumen is considered stiff and provides mixtures that are less susceptible to deformations and fatigue cracking when exposed to high temperatures. As illustrated in Fig. 3, the effects of WCO and WEO mixing on the softening point of bitumen samples are demonstrated. A linear reduction in the value of the softening point was seen as the waste oil percentage was increased ($R^2 = 0.98$). In this investigation, it was observed that replacing the VG 40 bitumen with WEO and WCO decreased the softening point of the resulting modified bitumen. As the amount of WEO and WCO in the solution increased, so was the drop in softening point. Compared to the WEO modified bitumen, the WCO modified bitumen took more time to solidify. When WEO and WCO were compared, no significant differences were found; however, up to 3% of waste oil usage was considered ideal because it was within a 47°C limit (Clause 6.2 IS: 73–2013 for VG 30 grade).

4.3. Effect of WEO and WCO on viscosity

The viscosity of bitumen during flow deformation was a representation of the frictional resistance between the internal molecules of the bitumen. The rotational viscosity of asphalt at 135°C was shown to be closely related to the frictional resistance

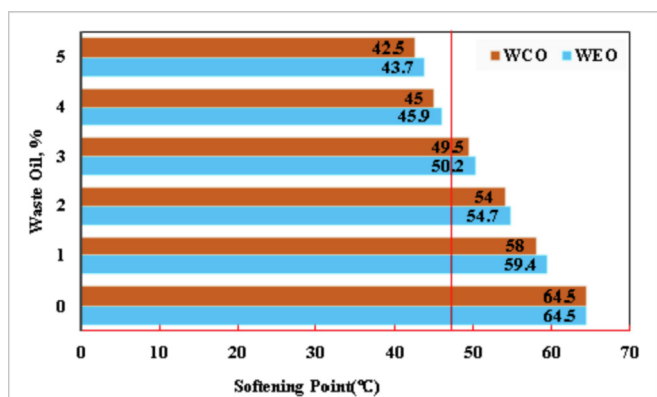


Fig. 3. Effect of WEO and WCO on softening point value.

between the internal molecules of the asphalt [3] when the mixing and compaction temperatures of the bituminous mixes were determined. Fig. 4 shows the impact of WCO and WEO on the viscosity of aged asphalt at 135°C. All viscosity values reduced as the amount of WEO or WCO in the solution increased. It was observed that when the VG 40 bitumen sample was tested under aged conditions, the viscosity value was 543cSt, whereas when the sample was tested under standard conditions, the viscosity value was 493cSt. With the addition of WEO, a decrease in viscosity was attained, whereas the addition of WCO resulted in an increase with a linear slope of $R^2 = 0.97$, and the addition of WCO resulted in an increase with a linear slope of $R^2 = 0.99$, respectively. According to the findings, 4% of waste oil is optimal because it produces results that are satisfactory in nature. It was discovered that the drop was within the acceptable range of 350cSt (Clause 6.2 of IS: 73–2013 for VG 30 grade) under consideration.

4.4. Effect of WEO and WCO on ductility

Ductility is a property of bitumen that is used to demonstrate its adhesive and cohesiveness. Fig. 5 illustrates that ductility increases as the percentage of waste oil in the mixture increases, which is related to the softness of bitumen. The ductility of an aged VG 40 sample was 32cm, and the ductility of all WCO and WEO modified binders in excess of 3 percent was greater than 100cm and could not be recorded since the highest ductility limit of the ductility machine used was only 100cm. A further increase in the oil content of the modified bitumen samples had no effect on the ductility value of the samples. When the amount of waste oil is increased, the ductility values remain constant after 3 percent, indicating that the WEO or WCO has little influence on the cohesiveness property of the bitumen. In this study, the ductility of WCO-modified bitumen was higher than that of WEO-modified bitumen, which means that WCO could help make aged bitumen more resistant to cracking and more temperature-resistant after being used.

4.5. Effect of WEO and WCO on penetration index and ageing ratio

An index was calculated using the measured penetrations and softening point temperatures to obtain the Penetration Index values. With a higher penetration index, temperature sensitivity is reduced but hardness is increased. [22]. Fig. 6 represents the relationship between the penetration index (PI) and the amount of WCO and WEO used. The figure indicates that the PI increases as the amount of oil present increases. The penetration index ranges from -1 to +1 for the majority of bituminous materials. It is considered that bituminous materials with PI values of less than -2

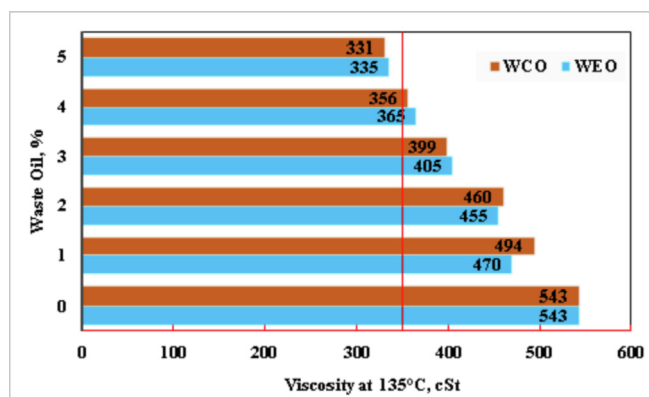


Fig. 4. Effect of WEO and WCO on viscosity.

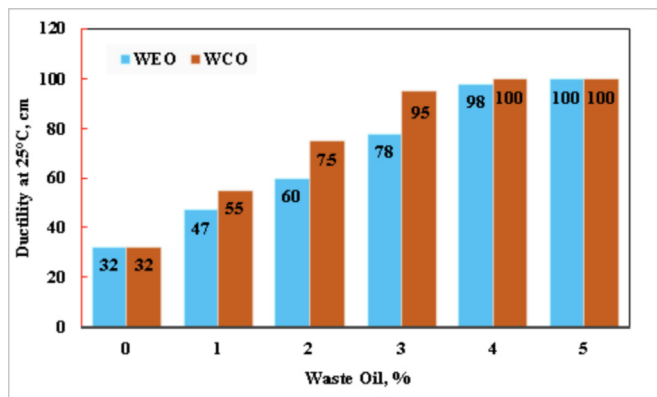


Fig. 5. Effect of WEO and WCO on ductility.

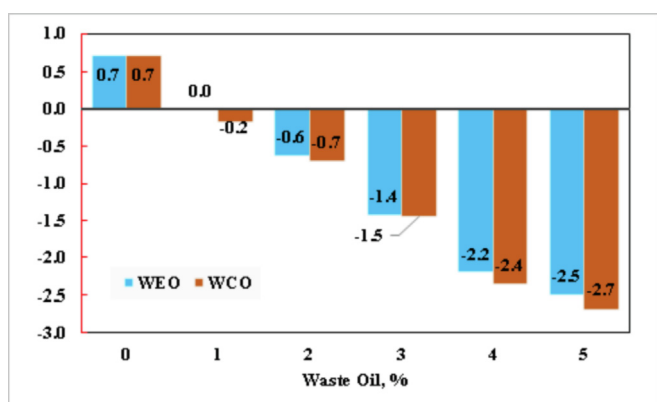


Fig. 6. Effect of WEO and WCO on penetration index.

are highly temperature sensitive and will become more brittle at lower temperatures [23]. All of the modified bitumen samples that contained more than 3% waste oil fell outside of the PI range for conventional bitumen. When it comes to the softening point and penetration characteristics of the modified bitumen, the addition of waste oil to the bitumen has been shown to have a counterbalancing effect. On the other hand, it can be shown that the penetration ageing ratio of VG 40 bitumen is 81, which is in relationship to the aged condition value of 29mm and the standard condition value of 36mm.

5. Conclusions and recommendations

The following conclusions were obtained from the results of the present study:

1. Under aged conditions, the modified binders including WCO and WEO demonstrated increased penetration values as well as reduced softening point temperatures when compared to VG 40 bitumen. Among the modified binders, the WEO effect in modified asphalt with VG 40 was more significant than the WCO effect in modified asphalt with VG 40.
2. The modification of VG 40 bitumen with WCO and WEO resulted in bitumen with a lower viscosity, and the use of up to 4% waste oil can be found to optimally maintain bitumen grade. The amount of waste oil is increased, the ductility values remain constant until 3 percent, showing that the WEO or WCO has no effect on the cohesiveness of the bitumen.

3. Waste cooking and engine oils can be used to successfully improve the physical qualities of bitumen. This observation indicates that when a higher percentage of waste oil was blended with bitumen, variability was observed, which resulted in a change in the quality of the bitumen that was formed. Overall, modified bitumen samples containing up to 3% waste oil produced the best results.

Considering the findings of this study, the following recommendations are made:

1. Further investigation should be carried out to determine the effect of WEO and WCO on modified asphalt that has been enhanced with polymer, crumb rubber, or any other warm mix additives.
2. The dynamic shear rheometer and a bending beam rheometer should be used to measure the performance of the bitumen at high and low temperatures in order to successfully determine the effect of waste oil on the temperature sensitivity of the bitumen.
3. It is also recommended to conduct a life cycle cost analysis on the aged asphalt that has been modified by WCO and WEO before applying it to the bituminous mixing plant.

CRedit authorship contribution statement

Arijit Kumar Banerji: Conceptualization, Writing - review & editing, Project administration, Supervision. **Dibakar Chakraborty:** Methodology, Formal analysis, Investigation, Writing - original draft, Visualization. **Aparajita Mudi:** Methodology, Formal analysis, Investigation, Writing - original draft, Visualization. **Priyanka Chauhan:** Writing - original draft, Investigation, Data curation.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

The authors are thankful to Dr. B. C. Roy Engineering College, Durgapur for their financial support for this work and the lab facility during our research work.

References

- [1] S. Liu, A. Peng, J. Wu, S.B. Zhou, Waste engine oil influences on chemical and rheological properties of different asphalt binders, *Construction and Building Materials* 191 (2018) 1210–1220, <https://doi.org/10.1016/j.conbuildmat.2018.10.126>.
- [2] M. Zahoor, S. Nizamuddin, S. Madapusi, F. Giustozzi, Sustainable asphalt rejuvenation using waste cooking oil: A comprehensive review, *Journal of Cleaner Production* 278 (2021), <https://doi.org/10.1016/j.jclepro.2020.123304>.
- [3] H. Li, B. Dong, W. Wang, G. Zhao, P. Guo, Q. Ma, Effect of waste engine oil and waste cooking oil on performance improvement of aged asphalt, *Applied Sciences* 9 (9) (2019) 1767, <https://doi.org/10.3390/app9091767>.
- [4] V.E. Uz, İ. Gökalp, Sustainable recovery of waste vegetable cooking oil and aged bitumen: Optimized modification for short and long term aging cases, *Waste Management* 110 (2020) 1–9, <https://doi.org/10.1016/j.wasman.2020.05.012>.
- [5] R.B. Ahmed, *Chemical, morphological, and rheological properties of various rejuvenated asphalt binders*, Memorial University of Newfoundland, 2020, *Doctoral dissertation*.
- [6] V. Pelitii, Ö. Doğan, H.J. Köroğlu, Waste oil management: Analyses of waste oils from vehicle crankcases and gearboxes, *Global Journal of Environmental Science and Management* 3 (1) (2017) 11–20. <https://doi.org/10.22034/GJESM.2017.03.01.002>.
- [7] S. Liu, H. Meng, Y. Xu, S. Zhou, Evaluation of rheological characteristics of asphalt modified with waste engine oil, *Petroleum Science and Technology* 36 (6) (2018) 475–480, <https://doi.org/10.1080/10916466.2018.1430157>.

- [8] D. Sun, G. Sun, Y. Du, X. Zhu, T. Lu, Q. Pang, S. Shi, Z. Dai, Evaluation of optimized bio-asphalt containing high content waste cooking oil residues, *Fuel* 202 (2017) 529–540, <https://doi.org/10.1016/j.fuel.2017.04.069>.
- [9] N.H.M. Kamaruddin, M.R. Hainin, N.A. Hassan, M.E. Abdullah, Rutting evaluation of aged binder containing waste engine oil, *Advanced Materials Research* 911 (2014) 405–409, <https://doi.org/10.4028/www.scientific.net/AMR.911.405>.
- [10] S.R. Fernandes, H.M. Silva, J.R. Oliveira, Developing enhanced modified bitumens with waste engine oil products combined with polymers, *Construction and Building Materials* 160 (2018) 714–724, <https://doi.org/10.1016/j.conbuildmat.2017.11.112>.
- [11] M.T. Rahman, M.R. Hainin, W.A.W.A. Bakar, Use of waste cooking oil, tire rubber powder and palm oil fuel ash in partial replacement of bitumen, *Construction and Building Materials* 150 (2017) 95–104, <https://doi.org/10.1016/j.conbuildmat.2017.05.216>.
- [12] IS 73-2013. “Paving Bitumen Specification”, Bureau of Indian Standards, New Delhi.
- [13] ASTM D 1754-2009, “Standard Test Method for Effects of Heat and Air on Asphaltic Materials (Thin-Film Oven Test)”, ASTM International.
- [14] M. Singh, Evaluating Physical, Rheological and Chemical Properties of Modified Bitumen, *Bonfring International Journal of Industrial Engineering and Management Science* 2 (4) (2012) 168–173, <https://doi.org/10.9756/BJIEMS.1698>.
- [15] IS 1203-1978. “Methods for Testing Tar and Bituminous Materials, Determination of Penetration”, Bureau of Indian Standards, New Delhi.
- [16] P. Cong, S. Chen, J. Yu, S. Wu, Effects of aging on the properties of modified asphalt binder with flame retardants, *Construction and Building Materials* 24 (12) (2010) 2554–2558, <https://doi.org/10.1016/j.conbuildmat.2010.05.022>.
- [17] IS 1205-1978. “Methods for Testing Tar and Bituminous Materials, Determination of Softening Point”, Bureau of Indian Standards, New Delhi.
- [18] P.A. Adesina, B.I. Dahunsi, Blended waste utilization in road construction: Physical characteristics of bitumen modified with waste cooking oil and high-density polyethylene, *International Journal of Pavement Research and Technology* 14 (1) (2021) 98–104, <https://doi.org/10.1007/s42947-020-0040-1>.
- [19] P. Kumar, M.T. Khan, M. Singh, Evaluation of physical properties of sbs modified bitumen and effect of aging, *Chemical Engineering* 46 (2012) 8299–8303.
- [20] ASTM D 4402-2006, “Standard Test Method for Viscosity Determination of Asphalt at Elevated Temperatures Using a Rotational Viscometer”, ASTM International.
- [21] IS 1208-1978. “Methods for Testing Tar and Bituminous Materials, Determination of Ductility”, Bureau of Indian Standards, New Delhi.
- [22] H. Taherkhani, S. Afroozi, The properties of nanosilica-modified asphalt cement, *Petroleum Science and Technology* 34 (15) (2016) 1381–1386, <https://doi.org/10.1080/10916466.2016.1205604>.
- [23] B. Golestani, B.H. Nam, F.M. Nejad, S. Fallah, Nanoclay application to asphalt concrete: Characterization of polymer and linear nanocomposite-modified asphalt binder and mixture, *Construction and Building Materials* 91 (2015) 32–38, <https://doi.org/10.1016/j.conbuildmat.2015.05.019>.